

CTE B Lift 320 Telescopic Truck Mounted Platform



This is a recent machine on to the market and was delivered to Eagle Access in the summer and is proving to be very popular, due to its many features etc

With outreach of up to 21m, and very small set up area this CTE B320 Truck Mounted Access Platform is ideal to use on busy locations and tight access areas making it very versatile.

A Great City Machine


With its option of either single sided or narrow jacking facilities this platform / cherry picker is ideal for working in traffic or pedestrianised areas.

The Rotating cage with hydraulic cage extension and excellent stabilization also make it very popular with contractors and window cleaners alike.



The Platform is driven by a separate engine, the silent pack as well as the backup of a Hatz Donkey Engine which is much more silent and produces far less emissions than the truck engine.

This machine is also very popular with Tree surgeons, Roofers, Gutter maintenance, Sealed unit replacement, Cavity wall work, Surveys, Demolition, Bat Surveys, Permanent and temporary communication mast service and repairs, line of Sights, Lighting inspections and repairs there is an endless list of possible jobs that can be done safer and faster with the use of this equipment.

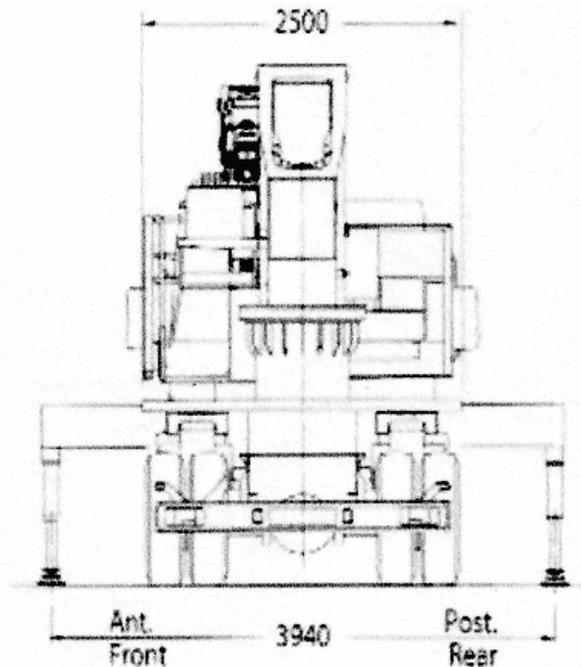

Features

OUTRIGGER FOOTPRINT

- ⊙ Telescopic boom (4 Sections) (Main Boom + 1 Extension) with opening angle 180 degrees 360 degrees continuous turret rotation on bearing turntable including powered hydraulics swivel.
- ⊙ Proportional electro hydraulic controls, with simultaneous manoeuvres (with ergonomic Joysticks)
- ⊙ Engine start / stop control from basket
- ⊙ Hydraulically extendable aluminium basket with 90 degree right and 90 degree left rotation Anti slip aluminium flatbed decking
- ⊙ Electronic basket levelling
- ⊙ Basket Load Sensing device
- ⊙ Automatic working range delimitation (180) with outriggers extended only on one side (Left/Right)
- ⊙ Working range with outriggers not extended (narrow Jacking)
- ⊙ 4x Hydraulic outriggers with ground pressure sensors
- ⊙ Booms at centre warning lights at control stations (Cab Protection)
- ⊙ Water or compressed air socket in the basket
- ⊙ 230v ac CE Electric socket in basket
- ⊙ Buzzer indicating PTO engaged
- ⊙ Hour meter
- ⊙ Flashing Beacons and strobes
- ⊙ Donkey Engine for emergency operations and low emission plus quieter operations Dual electric emergency lowering pumps for extra peace of mind and safety

Performance

- Ⓟ Working Height 32 Metres
- Ⓟ Platform Height 30 Metres
- Ⓟ Working Outreach 20/21m
- Ⓟ Cage Capacity 120/280kg
- Ⓟ GVW minimum 18 t

